

1500 EX



www.ommelift.com

Trailer lift - Articulated

ÅDALEN

Aadalen Truck AS


Trøskeneveien 36
Sarpsborg, 1708, Norge
+47 69 10 21 50
post@aadalen.no
www.aadalen.no

OMMELIFT



Built to last - ask our users!

1500 EX Trailer lift

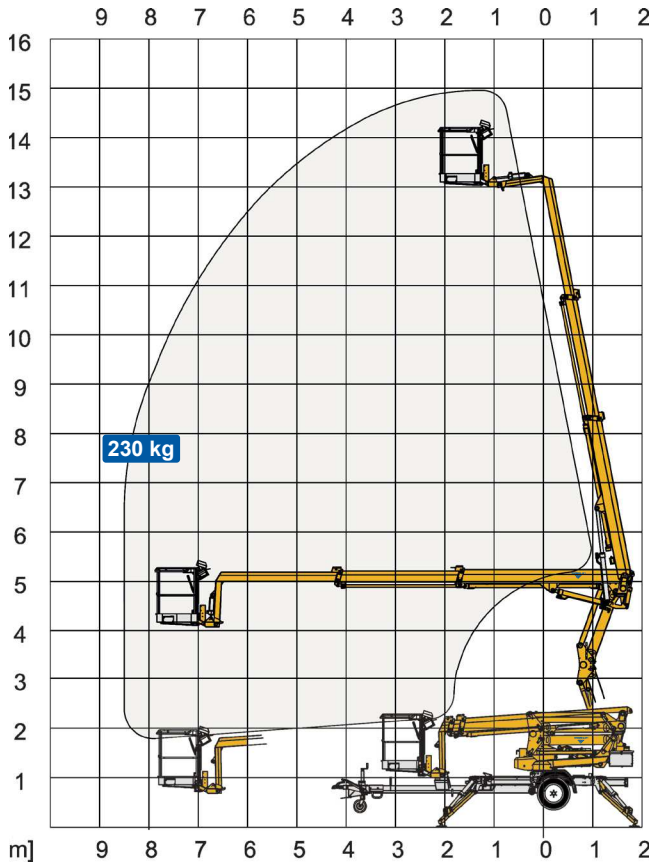

Technical Data:		1500 EX	1500 EXB	1500 EXB Lightweight
Max. working height			15.0 m	
Max. platform height			13.0 m	
Max. outreach			8.5 m	
Up and over clearance			5.0 m	
Angle boom length (boom + basket)			2.0 m	
Jib length (jib + basket)			-	
Vertical jib rotation			-	
Turret rotation			± 355°	
Basket rotation			± 50°	
Max. basket load			230 kg	
Basket size			1.25 x 0.8 x 1.1 m	
Stabilizer pad size			ø200 mm	
	⁵ Petrol ⁶ Diesel	230V / 16A	BATTERY	Lithium
Engine			⁵ Option ⁶	
Fuel tank capacity				
Generator				
Battery pack			24V/120Ah/5h	24V/120Ah
Charger			24 V / 15 A	24 V / 40 A
Double charger system			Optional	Optional
Elec. descent			Optional	
See www.ommelift.com for more features and options				
Self-propulsion with hydraulic engagement of traction rollers			Standard	
Gradeability			14% / 8°	
Ground to tire clearance at max. set-up			Min. 300 mm (10.8% / 6.1°)	
Total weight		2000 kg	2050 kg	2000 kg
Ground pressure, outrigger pad		12.9 kg/cm ²	12.4 kg/cm ²	12.9 kg/cm ²
Ground pressure with 0.4 x 0.4 m spreader plate		0.7 kg/cm ²	0.7 kg/cm ²	0.7 kg/cm ²
Max. force, outrigger		10.5 kN	10.5 kN	10.5 kN
Hydraulic stabilizers			Standard	
Controls			2-step	
Flush basket mount			Standard	
Elec. power outlet in basket			Standard	
Tool trays in basket			Standard	

